

UTILITY PATENT APPLICATION  
UNDER 37 CFR 1.53(b)

Assistant Commissioner for Patents  
Washington D.C. 20231

Case Docket No. 4468-012

JC893 U.S. PTO  
09/712844  
11/15/00

Sir:

Transmitted herewith for filing is the patent application of:

INVENTOR: Kazuhiro SHIMAWAKI  
FOR: RECEPTION DATA SYNCHRONIZING APPARATUS AND METHOD, AND  
RECORDING MEDIUM WITH RECORDED RECEPTION DATA SYNCHRONIZING  
PROGRAM

Enclosed are:

- ☒ [ X ] 38 pages of specification, claims, abstract
- ☒ [ X ] Declaration & Power of Attorney
- ☒ [ X ] Priority Claimed
- ☒ [ X ] Certified copy of Japanese Patent Application No. 323624/1999 filed November 15, 1999
- ☒ [ X ] 8 sheets of formal drawing
- ☒ [ X ] An assignment of the invention to ADVANTEST CORPORATION and the assignment recordation fee
- ☐ [ ] A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☒ [ X ] Return Receipt Postcard
- ☐ [ ] Information Disclosure Statement, Form PTO-1449
- ☐ [ ] Copies of IDS Citations
- ☐ [ ] Change of Address

The filing fee has been calculated as shown below:

	NO. FILED		NO. EXTRA	RATE	AMOUNT
Total Claims	20	MINUS 20	0	x \$18 =	\$ 0.00
Independent Claims	16	MINUS 3	13	x \$80 =	\$ 1040.00
If multiple dependent claims are presented, add \$ 270.00					\$ 0.00
Basic Fee					\$ 710.00
Total of above calculations					\$ 1750.00
<input checked="" type="checkbox"/> [ X ] Assignment and Recording Fee					\$ 40.00
TOTAL FEE					\$ 1790.00

- [ X ] Please charge my Credit Card in the amount of \$ 1790.00. A Credit Card Payment Form (PTO-2038) is enclosed.
- [ ] Please charge my Deposit Account No. 07-1337 in the amount of \$ .00. A duplicate copy of this sheet is enclosed.
- [ X ] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 07-1337.
- [ X ] Any additional filing fees required under 37 CFR 1.16.
- [ X ] The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 07-1337. A duplicate copy of this sheet is enclosed.
- [ X ] Any patent application processing fees under 37 CFR 1.17.
- [ X ] Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

LOWE HAUPTMAN GILMAN & BERNER, LLP

*Kenneth M. Berner*

Kenneth M. Berner  
Registration No. 37,093

1700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314  
(703) 684-1111  
(703) 518-5499 Facsimile  
Date: November 15, 2000  
KMB/nm

# RECEPTION DATA SYNCHRONIZING APPARATUS AND METHOD, AND RECORDING MEDIUM WITH RECORDED RECEPTION DATA SYNCHRONIZING PROGRAM

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention relates to a measurement of bit errors, and particularly, to acquisition of a synchronization between reception data past a DUT (Device Under Test) and expectation data by detecting synchronism patterns contained in the reception data and the expectation data.

### 2. Description of the related art

In cases of data communications by optical fibers there occurs a case causing a bit error. It is then necessary to detect the bit error to be corrected.

Fig. 8 shows a system arrangement for making a detection of bit error.

A first pattern generator 52 gives electric data to a DUT (device under test as an element to be measured) 60. The DUT 60 has an E/O (electric/optic) converter 61, O/E (optic/electric) converter 62, and an optical fiber 63. The electric data given to the DUT 60 is converted by the E/O converter 61 into light, which is transmitted through the optical fiber 63 and returned by the O/E converter 62 again into electric data. The data output from the DUT 60 is called reception data.

A second pattern generator 54 generates expectation data for collation with the reception data. At a collator 56, the reception data is collated with the expectation data to find part of the reception data inconsistent with the expectation data, if any, as an inconsistent part to be a bit error.

At the collator 56, for collation between the reception data and the

expectation data, there is needed a synchronism to be obtained between the reception data and the expectation data. There is thus detected a synchronism pattern contained in the reception data, and the expectation data is generated in accordance with the detected timing, thereby obtaining a synchronism.

## SUMMARY OF THE INVENTION

However, the reception data contains also a false synchronism pattern, which is not a synchronism pattern, but has like data to the synchronism pattern. Or there is a case in which, due to a bit error of the reception data, a pattern different of data from the synchronism pattern is recognized as a synchronism pattern. Such a pattern can also be deemed as a false synchronism pattern. If an erroneous synchronization is resulted from a false synchronism pattern, there is an inconsistency in phase.

It therefore is an object of the present invention to provide a reception data synchronizing apparatus that allows a synchronization to be obtained between reception data and expectation data even with an inconsistency in phase due to a false synchronism pattern.

According to the present invention described in claim 1, a reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a synchronism pattern detecting position recording unit for recording a synchronism timing at which the synchronism pattern of the reception data is detected; a collation and synchronism decision unit for collating the reception data with reference data to decide whether or not the reception data is consistent in

phase with the reference data; and a synchronism control unit operative, when the collation and synchronism decision unit gives a decision for inconsistency in phase, for a match between a timing at which the synchronism pattern is detected after the synchronism timing recorded in the synchronism pattern detecting position recording unit and a timing of a synchronism pattern of the expectation data.

In a reception data synchronizing apparatus arranged as above-noted, even with an inconsistency in phase between reception data and reference data, it is after a synchronism timing at which a synchronism pattern when synchronized is detected that a detection of the synchronism pattern restarts to make the reception data and the reference data consistent in phase, thus allowing for the reception data to be synchronized with expectation data even with an inconsistency in phase due to a false synchronism pattern.

According to the present invention described in claim 2, a reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a synchronism pattern detecting timing recording unit for recording a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data; a collation and synchronism decision unit for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating unit operative, when the collation and synchronism decision unit gives a decision for inconsistency in phase, for a match between the synchronism pattern detecting timing recorded in the synchronism pattern detecting timing recording unit, as a subsequent one, and a timing of a synchronism pattern of the expectation data.

In a reception data synchronizing apparatus arranged as above-noted,

even with an inconsistency in phase between reception data and reference data, it is by a match between a next synchronism pattern detecting timing and a timing of a synchronism pattern of expectation data that the reception data and the reference data are made consistent in phase, thus allowing for the reception data to be synchronized with the expectation data even with an inconsistency in phase due to a false synchronism pattern.

Further, the next synchronism pattern detecting timing in record is used to render the reception data and the reference data consistent in phase, without the need of waiting a detection of synchronism pattern, thus allowing for a rapid synchronization to be obtained between the reception data and the expectation data.

The present invention described in claim 3, is a reception data synchronizing apparatus according to claim 2, wherein the timing generating unit transmits a predetermined reference timing signal, and the synchronism pattern detecting timing recording unit records the reference timing signal when the synchronism pattern is detected, as the synchronism pattern detecting timing.

According to the present invention described in claim 4, a reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a phase difference recording unit for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as an initial one at which the synchronism pattern is initially detected; a collation and synchronism decision unit for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating unit operative, when the collation and synchronism

decision unit gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data from the synchronism pattern detecting timing, as the initial one, by the time difference recorded in the synchronism pattern detecting timing recording unit.

In a reception data synchronizing apparatus arranged as above-noted also, there can be obtained a synchronization between reception data and expectation data even with an inconsistency in phase due to a false synchronism pattern, like the invention of claim 2.

Further, a phase difference in record is used to render the reception data and reference data consistent in phase, without the need of waiting a detection of synchronism pattern, thus allowing for a rapid synchronization to be obtained between the reception data and the expectation data.

According to the present invention described in claim 5, a reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a phase difference recording unit for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as a previous one at which the synchronism pattern is detected in a previous time; a collation and synchronism decision unit for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating unit operative, when the collation and synchronism decision unit gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data by the time difference recorded in the synchronism pattern detecting timing recording unit.

In a reception data synchronizing apparatus arranged as above-noted also,

there can be obtained a synchronization between reception data and expectation data even with an inconsistency in phase due to a false synchronism pattern, like the invention of claim 2.

Further, a phase difference in record is used to render the reception data and the reference data consistent in phase, without the need of waiting a detection of synchronism pattern, thus allowing for a rapid synchronization to be obtained between the reception data and the expectation data.

According to the present invention described in claim 6, a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a synchronism pattern detecting position recording step for recording a synchronism timing at which the synchronism pattern of the reception data is detected; a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a synchronism control step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for a match between a timing at which the synchronism pattern is detected after the synchronism timing recorded in the synchronism pattern detecting position recording step and a timing of a synchronism pattern of the expectation data.

According to the present invention described in claim 7, a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a synchronism pattern detecting timing recording step for recording a synchronism pattern detecting timing at which the synchronism pattern is detected in the



reception data; a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for a match between the synchronism pattern detecting timing recorded in the synchronism pattern detecting timing recording step, as a subsequent one, and a timing of a synchronism pattern of the expectation data.

The present invention described in claim 8, a reception data synchronizing method according to claim 7, wherein the timing generating step transmits a predetermined reference timing signal, and the synchronism pattern detecting timing recording step records the reference timing signal when the synchronism pattern is detected, as the synchronism pattern detecting timing.

According to the present invention described in claim 9, a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a phase difference recording step for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as an initial one at which the synchronism pattern is initially detected; a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data from the synchronism pattern detecting timing, as the initial one, by the time difference recorded in the synchronism pattern detecting timing recording step.

According to the present invention described in claim 10, a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a phase difference recording step for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as a previous one at which the synchronism pattern is detected in a previous time; a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data by the time difference recorded in the synchronism pattern detecting timing recording step.

According to the present invention described in claim 11, a computer-readable medium embodying a program of instructions for execution by the computer to perform a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a synchronism pattern detecting position recording step for recording a synchronism timing at which the synchronism pattern of the reception data is detected; a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a synchronism control step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for a match between a timing at which the synchronism pattern is detected after the synchronism timing recorded in the synchronism

pattern detecting position recording step and a timing of a synchronism pattern of the expectation data.

According to the present invention described in claim 12, a computer-readable medium embodying a program of instructions for execution by the computer to perform a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a synchronism pattern detecting timing recording step for recording a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data; a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for a match between the synchronism pattern detecting timing recorded in the synchronism pattern detecting timing recording step, as a subsequent one, and a timing of a synchronism pattern of the expectation data.

The present invention described in claim 13, a computer-readable medium according to claim 12, wherein the timing generating step transmits a predetermined reference timing signal, and the synchronism pattern detecting timing recording step records the reference timing signal when the synchronism pattern is detected, as the synchronism pattern detecting timing.

According to the present invention described in claim 14, a computer-readable medium embodying a program of instructions for execution by the computer to perform a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the

reception data, includes: a phase difference recording step for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as an initial one at which the synchronism pattern is initially detected; a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data from the synchronism pattern detecting timing, as the initial one, by the time difference recorded in the synchronism pattern detecting timing recording step.

According to the present invention described in claim 15, a computer-readable medium embodying a program of instructions for execution by the computer to perform a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a phase difference recording step for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as a previous one at which the synchronism pattern is detected in a previous time; a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data by the time difference recorded in the synchronism pattern detecting timing recording step.

09712344-1150  
00577-1122260

According to the present invention described in claim 16, a reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a synchronism pattern detecting position recording device that records a synchronism timing at which the synchronism pattern of the reception data is detected; a collation and synchronism decision device that collates the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a synchronism control device operative, when the collation and synchronism decision device gives a decision for inconsistency in phase, for a match between a timing at which the synchronism pattern is detected after the synchronism timing recorded in the synchronism pattern detecting position recording device and a timing of a synchronism pattern of the expectation data.

According to the present invention described in claim 17, a reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a synchronism pattern detecting timing recording device that records a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data; a collation and synchronism decision device that collates the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating device operative, when the collation and synchronism decision device gives a decision for inconsistency in phase, for a match between the synchronism pattern detecting timing recorded in the synchronism pattern detecting timing recording device, as a subsequent one, and a timing of a synchronism pattern of

the expectation data.

The present invention described in claim 18, is a reception data synchronizing apparatus according to claim 2, wherein the timing generating device transmits a predetermined reference timing signal, and the synchronism pattern detecting timing recording device records the reference timing signal when the synchronism pattern is detected, as the synchronism pattern detecting timing.

According to the present invention described in claim 19, a reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a phase difference recording device that records a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as an initial one at which the synchronism pattern is initially detected; a collation and synchronism decision device that collates the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating device operative, when the collation and synchronism decision device gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data from the synchronism pattern detecting timing, as the initial one, by the time difference recorded in the synchronism pattern detecting timing recording device.

According to the present invention described in claim 20, a reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, includes: a phase difference recording device that records a time difference between a synchronism

pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as a previous one at which the synchronism pattern is detected in a previous time; a collation and synchronism decision device that collates the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and a timing generating device operative, when the collation and synchronism decision device gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data by the time difference recorded in the synchronism pattern detecting timing recording device.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the arrangement of a reception data synchronizer according to a first embodiment of the invention;

Fig. 2 is a status transition diagram showing actions of the first embodiment;

Fig. 3 is a diagram showing an example of obtaining a synchronization between reception data and expectation data of the first embodiment;

Fig. 4 is a block diagram showing the arrangement of a reception data synchronizer according to a second embodiment of the invention;

Fig. 5 is a status transition diagram showing actions of the second embodiment;

Fig. 6 is a diagram showing an example of obtaining a synchronization between reception data and expectation data of the second embodiment;

Fig. 7 is a block diagram showing the arrangement of a reception data synchronizer according to a third embodiment of the invention; and

Fig. 8 is a block diagram showing a system arrangement for performing a bit error detection in the prior art.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

### First Embodiment

There will be described below a first embodiment of the invention with reference to the drawings. First, there is described the arrangement of a reception data synchronizer according to a first embodiment. Fig. 1 is a block diagram showing the arrangement of the reception data synchronizer according to the first embodiment.

The reception data synchronizer 1 includes a collator 10, a synchronism decider 12, a synchronism pattern detector 14, a synchronism controller 16, a synchronism pattern detecting position recorder 18, and a second data generator 54.

The collator 10 performs a collation between input reception data and expectation data, detecting a different data between the two data, bit by bit, that is, for a detection of bit error.

The reception data input to the collator 10 is output from a first pattern generator 52 via a DUT 60. The DUT 60 includes an E/O (electric/optical) converter 61, an O/E (optical/electric) converter 62, and an optical fiber 63. At both ends of the optical fiber 63 are connected the E/O converter 61 and the O/E converter 62. To the E/O converter 61 is connected the first pattern generator 52, and to the O/E converter 62, the collator 10. The expectation data input to the collator 10 is input from the second data generator 54.

The synchronism decider 12 decides whether or not the reception data and



the expectation data have consistent phases, that is, if they are in synchronism. The decision for synchronism is made for a synchronism to be decided if bit errors detected at the collator 10 are under a predetermined amount. If they are out of synchronism, their phases are inconsistent, causing a great amount of different data. Thus, a consistency in phase can be decided by this method. The synchronism decider 12, when deciding phases to be inconsistent, transmits the effect to a synchronism controller 16 and a synchronism pattern detecting position recorder 18 to be described later.

The synchronism pattern detector 14 is adapted, in a state of the later-described synchronism pattern detecting position recorder 18 providing a permission for a detection of synchronism pattern, for detecting a synchronism pattern from the reception data to notify information of the detection timing to the later-described synchronism controller 16 and the synchronism pattern detecting position recorder 18.

The synchronism controller 16 is adapted, when notified of a synchronism pattern detection from the synchronism pattern detector 14, to release the second data generator 54 from a reset state and, at a timing at which a position of the detected synchronism pattern and a position of a synchronism pattern of the expectation data are consistent, to have the second data generator 54 generate the expectation data, permitting the synchronism decider 12 to make a decision of synchronism. It is further adapted, upon reception of a phase inconsistency from the synchronism decider 12, to reset the second data generator 54, initializing the second data generator 54 so that the expectation data stops at a predetermined phase until the resetting becomes released.

The synchronism pattern detecting position recorder 18 records a timing (position) where the synchronism pattern of the reception data is detected. Further, upon reception of a notification of phase inconsistency from the

synchronism decider 12, it permits the synchronism pattern detector 14 to detect a synchronism pattern from a position next to the position in the reception data at which the synchronism pattern is detected.

Next, there are described actions of the first embodiment by using a status transition diagram of Fig. 2.  $T_{s0}$ ,  $T_c$ , and  $T_{w0}$  are necessary times for P2, P4, and P6, respectively. From the first pattern generator 52 is input reception data, via the DUT 60, to the synchronism pattern detector 14. At the synchronism pattern detector 14, there is detected a synchronism pattern in the reception data (P2).

The synchronism pattern detector 14 having detected the synchronism pattern in the reception data notifies the synchronism controller 16 and the synchronism pattern detecting position recorder 18 of information on a timing of the detection ( $P2 \rightarrow P4$ ). Then, the synchronism controller 16 gives a permission for a decision of synchronism to the synchronism decider 12 ( $P2 \rightarrow P4$ ).

The synchronism detector 12 decides, depending on an amount of bit errors output from the collator 10, whether the reception data and the expectation data are in synchronism (P4). If they are in synchronism, the decision of synchronism is continued to be made on the basis of a bit error amount ( $P4 \rightarrow P4$ ).

If they are inconsistent in phase (synchronism disorder), the synchronism controller 16 resets the second data generator 54 to interrupt transmission of the expectation data ( $P4 \rightarrow P6$ ). Then, the detection of synchronism pattern at the synchronism pattern detector 14 is stopped up to a position of synchronism pattern recorded in the synchronism pattern detecting position recorder 18 (P6).

Upon arrival to the position of synchronism pattern recorded in the synchronism pattern detecting position recorder 18, the synchronism pattern

detecting position recorder 18 gives a permission for a detection of synchronism pattern to the synchronism pattern detector 14 ( $P6 \rightarrow P2$ ), and the synchronism pattern detector 14 detects the synchronism pattern in the reception data (P2). Then, if the synchronism pattern is detected, the control flow goes to the synchronism deciding state (P4). Like this, even in the case of a failed synchronism due to a false synchronism pattern, the synchronization can be redone.

Fig. 3 is an example of reception data and the like. Using Fig. 3, an exemplary procedure is described to show how to obtain a synchronization. The reception data has a synchronism pattern 30 and a false synchronism pattern 32. The expectation data also has a synchronism pattern 70 and a false synchronism pattern 72. The synchronism pattern detecting position recorder 18 has an internal reference timing of an identical period to the reception data and the expectation data. If the false synchronism pattern 32 of the reception data is first mistaken as a synchronism pattern at a position of an internal reference timing 4, the timing is recorded in the synchronism pattern detecting position recorder 18 and occurrence of the expectation data starts, causing a transition from the synchronism pattern detecting state to a synchronism deciding state ( $P2 \rightarrow P4$ ). The synchronism pattern detected from the reception data is the false synchronism pattern 32, which is different from the true synchronism pattern 30, and hence is decided to be inconsistent in phase at the synchronism decider 12, causing a transition from the synchronism deciding state to a synchronism pattern detection start timing waiting state (P6), where the second data generator 54 is initialized. Next, following an interruption of synchronism pattern detection up to the synchronism pattern detecting timing (internal reference timing 4) recorded in the synchronism pattern detecting position recorder 18, there occurs a transition from the synchronism pattern detection start timing

waiting state to a synchronism pattern detecting state ( $P6 \rightarrow P2$ ). Thereafter, the true synchronism pattern 30 is detected at a position of an internal reference timing 0, causing a transition from the synchronism pattern detecting state to a synchronism deciding state ( $P2 \rightarrow P4$ ), where a decision for a phase consistency is given at the synchronism decider 12, with an established synchronism.

It is now assumed that  $Tw0$  is a time interval from the time when it is failed to obtain a synchronism to a start time of a detection of synchronism pattern,  $Ts0$  is a time interval from the start time of the detection of synchronism pattern to a time when a synchronism pattern is detected, and  $Tc$  is a time interval for deciding whether or not a synchronism pattern of reception data and a synchronism pattern of expectation data are identical in phase.

Then, an average sync gain time  $Tsync0$  is about  $0.5 N_p \times (Tw0 \text{ in average} + Ts0 \text{ in average} + Tc \text{ in average})$ , where  $N_p$  is the number of synchronism patterns detected within one period.

According to the first embodiment, even with an inconsistency in phase due to a false synchronism pattern, the synchronism pattern detecting position recorder 18 allows for the synchronism pattern detector 14 to redo a detection of synchronism pattern from a timing (position) where a previous synchronism is obtained, so that a synchronism can be obtained between reception data and expectation data even with a phase inconsistency.

## Second Embodiment

There will be described below a second embodiment of the invention with reference to the drawings. The second embodiment is different in that a timing (position) at which a synchronism pattern in reception data is detected is recorded in a synchronism pattern detecting timing recorder 20, and is used for a synchronization to be redone.

First, there is described the arrangement of a reception data synchronizer according to the second embodiment. Like parts to the first embodiment are designated by like reference characters, omitting their description. Fig. 4 is a block diagram showing the arrangement of the reception data synchronizer according to the second embodiment. Like parts to the first embodiment are designated by like reference numerals, omitting their description.

The reception data synchronizer 1 includes a collator 10, a synchronism decider 12, a synchronism pattern detector 14, the synchronism pattern detecting timing recorder 20, a timing generator 22, and a second data generator 54.

The synchronism decider 12, when deciding phases to be inconsistent, transmits the effect to the synchronism pattern detecting timing recorder 20 to be described later.

The synchronism pattern detector 14 detects a synchronism pattern from reception data, and makes a notification of the effect to the synchronism pattern detecting timing recorder 20 to be described later.

The synchronism pattern detecting timing recorder 20 is notified of a detection of the synchronism pattern from the synchronism pattern detector 14. Then, it receives an internal reference timing of the reception data synchronizer 1, from the timing generator 22 to be described later. Then, it records the internal reference timing at the time when the synchronism pattern is detected. Further, upon reception of a notification of phase inconsistency from the synchronism decider 12, it transmits the internal reference timing at the time when the synchronism pattern is detected, to the timing generator 22.

Upon reception of the internal reference timing at the time when the synchronism pattern is detected, the timing generator 22 gives a permission for synchronism decision to the synchronism decider 12. Moreover, it makes the second data generator 54 transmit therefrom expectation data so that a position of

a synchronism pattern of the expectation data coincides with a position of the detected synchronism pattern. Further, it sends a predetermined reference timing signal (called an internal reference timing) to the synchronism pattern detecting timing recorder 20.

Next, there are described actions of the second embodiment by using a status transition diagram of Fig. 5. Tjdg is a required time at P4, while the Tjdg is substantially equal to Tc.

From the first pattern generator 52 is input reception data, via a DUT 60, to the synchronism pattern detector 14. At the synchronism pattern detector 14, there is detected a synchronism pattern in the reception data (P2).

The synchronism pattern detector 14 having detected the synchronism pattern in the reception data notifies the synchronism pattern detecting timing recorder 20 of the effect and a position of the synchronism pattern in the reception data. The synchronism pattern detecting timing recorder 20, receiving those, outputs to the timing generator 22 a signal (as synchronism pattern timing information) indicating a timing of detection of the synchronism pattern (P2 → P4). Then, the timing generator 22 responds to the synchronism pattern timing information by controlling the second data generator 54 so that the position of the detected synchronism pattern of the reception data and the position of the synchronism pattern of the expectation data coincide with each other, and by giving a permission for a decision of synchronism to the synchronism decider 12 (P2 → P4).

The synchronism detector 12 decides, depending on an amount of bit errors output from the collator 10, whether the reception data and the expectation data are in synchronism (P4). If they are in synchronism, the decision of synchronism is continued to be made on the basis of a bit error amount (P4 → P4).

If they are inconsistent in phase (synchronism disorder), there is taken one of different processes depending on whether a subsequent synchronism pattern has already been detected or not. If an internal reference timing at the time when the synchronism pattern was detected has already been recorded in the synchronism pattern detecting timing recorder 20 (P4 → P5), the timing generator 22 controls the second data generator 54 so that the synchronism pattern of the expectation data is matched with the internal reference timing at the time when the synchronism pattern was detected (P5). Then, when the matching of the synchronism pattern of the expectation data is finished (P5 → P4), the control flow returns to the decision on whether or not synchronized (P4).

Unless an internal reference timing at the time when the synchronism pattern was detected has already been recorded in the synchronism pattern detecting timing recorder 20 (P4 → P7), there is kept a waiting (P7) until an internal reference timing at the time when the synchronism pattern is detected is recorded in the synchronism pattern detecting timing recorder 20. Then, the synchronism pattern detecting timing recorder 20 sends an internal reference timing at the time when the synchronism pattern is detected to the timing generator 22, and there is made a decision of synchronism (P7 → P2 → P4).

Upon arrival to a position of synchronism pattern recorded last time, the synchronism pattern detecting timing recorder 20 restarts recording a detection timing of synchronism pattern (P6 → P2). Then, if a synchronism pattern is detected, the control flow goes to a synchronism deciding state (P4). Like this, even in the case of a failed synchronism due to a false synchronism pattern, the synchronization can be redone.

Fig.6 is an example of reception data and the like. Using Fig. 6, an exemplary procedure is described to show how to obtain a synchronization. The reception data has a synchronism pattern 30 and false synchronism patterns 40,

42. The expectation data also has a synchronism pattern 70 and false synchronism patterns 80, 82.

First, if the false synchronism pattern 40 is mistaken as the synchronism pattern 30 by the synchronism pattern detector 14 ( $P2 \rightarrow P4$ ), the timing generator 22 controls the second data generator 54 so that the synchronism pattern 70 of the expectation data is matched with a timing (position) 4 of the false synchronism pattern 40, to transmit the expectation data. Then, there is made a decision of synchronism between the reception data and the expectation data ( $P4$ ), Fig. 6(a).

As a result, with no synchronism obtained, phases are inconsistent. However, as a timing (position) 7 of the false synchronism pattern 42 is recorded in the synchronism pattern detecting timing recorder 20 ( $P4 \rightarrow P5$ ), Fig. 6(b), the timing generator 22 controls the second data generator 54 so that the synchronism pattern 70 of the expectation data is matched with the timing (position) 7 of the false synchronism pattern 42, to transmit the expectation data. Then, there is made a decision of synchronism between the reception data and the expectation data ( $P4$ ), Fig. 6(c).

As a result, with no synchronism obtained, phases are inconsistent. However, as a timing (position) 12 of the synchronism pattern 30 is recorded in the synchronism pattern detecting timing recorder 20 ( $P4 \rightarrow P5$ ), Fig. 6(d), the timing generator 22 controls the second data generator 54 so that the synchronism pattern 70 of the expectation data is matched with the timing (position) 12 of the synchronism pattern 30, to transmit the expectation data. Then, there is made a decision of synchronism between the reception data and the expectation data ( $P4$ ), Fig. 6(e).

Now, with a synchronism obtained, there is continuously made a decision of synchronism ( $P4 \rightarrow P4$ ).



According to the second embodiment, even with false synchronism patterns, the second data generator 54 can generate expectation data for a synchronization to be redone, in accordance with a timing when a synchronism pattern recorded in the synchronism pattern detecting timing recorder 20 is detected, so that a synchronism can be obtained between reception data and expectation data.

Further, in the second embodiment, a sync gain time is (an average required time for a single decision of phase consistency)  $\times N_p$  at the longest, or 0 at the shortest, and an average sync gain time is (the average required time for a single decision of phase consistency)  $\times N_p / 2$ . The average required time for a single decision of phase consistency is substantially equal to an average of  $T_c$ , and can be shortened by  $0.5N_p \times (T_{w0} \text{ in average} + T_{s0} \text{ in average})$  in comparison with the first embodiment. Thus, the average sync gain time can be rendered small. Therefore, bit errors can be detected in a short bit sequence such as a burst data.

For example, assuming a case of data having a pattern length of 1M bits, a data rate of 100 Mbps, and an  $N_p$  of 10, then  $T_{w0}$  is 0 at the shortest or identical in time to one period of data at the longest. Therefore, an average  $T_{w0}$  is (one period of data) / 2. An average  $T_{s0}$  is (one period of data) / (2  $\times N_p$ ) ( $T_{s0}$  to be 0 at the shortest or one period of data /  $N_p$  at the longest). Therefore, in the first embodiment,  $T_{w0} \text{ in average} = (1M / 100M) / 2 = 0.005 [s] = 5 [ms]$ ,  $T_{s0} \text{ in average} = (1M / 100M) / (2 \times 10) = 0.0005 [s] = 0.5 [ms]$ , and  $T_c \text{ in average} = 1 [ms]$ . Therefore, the average sync gain time =  $(10 / 2) \times (5 + 0.5 + 1) = 32.5 [ms]$ . On the other hand, in the second embodiment, the average sync gain time =  $(10 / 2) \times T_c = 5 [ms]$ . As will be seen from this example, the average sync gain time in the second embodiment is shorter than the average sync gain time in the first embodiment.

### Third Embodiment

There will be described below a third embodiment of the invention with reference to the drawings. In comparison with the second embodiment using the synchronism pattern detecting timing recorder 20, the third embodiment is different in that it uses a phase difference recorder 26 for recording a phase difference between a detected synchronism pattern and an initially detected synchronism pattern or a phase difference between a detected synchronism pattern and a synchronism pattern detected in a previous time.

First, there is described the arrangement of a reception data synchronizer according to the third embodiment. Like parts to the first embodiment are designated by like reference characters, omitting their description. Fig. 7 is a block diagram showing the arrangement of the reception data synchronizer according to the third embodiment. Like elements to the first embodiment are designated by like reference numerals, omitting their description.

The reception data synchronizer 1 includes a collator 10, a synchronism decider 12, a synchronism pattern detector 14, a timing generator 22, a phase difference detector 24, the phase difference recorder 26, and a second data generator 54.

The phase difference detector 24, having received a notification of a detected synchronism pattern from the synchronism pattern detector 16, detects a phase difference between the detected synchronism pattern and an initially detected synchronism pattern or a phase difference between the detected synchronism pattern and a synchronism pattern detected in a previous time, and sends it to the phase difference recorder 26 to be described later. The phase difference recorder 26 records the phase difference detected by the phase difference detector 24.

Actions of the third embodiment are analogous to the second embodiment, but for the difference that a phase difference is used. The phase difference is used for changing phases of expectation data (P5, see Fig. 5). As a description using an example of Fig. 6, in the second embodiment, the synchronism pattern 70 of the expectation data is matched with the internal reference timings 4, 7, and 12, one by one in this order.

In the third embodiment, there are recorded in the phase difference recorder 26 a timing 4 at which a synchronism pattern is initially detected, a difference 3 (7-4) between a timing at which the synchronism pattern is detected twice and the timing at which the synchronism pattern is initially detected, and a difference 8 (12-4) between a timing at which the synchronism pattern is detected thrice and the timing at which the synchronism pattern is initially detected, and unless a synchronism is obtained at the timing 4, the timing of the synchronism pattern 70 is shifted by 3 to make a decision of synchronism at a resultant timing, and unless a synchronism is then obtained, the timing of the synchronism pattern 70 is shifted by 8 from the initial to make a decision of synchronism at a resultant timing.

Or, in the third embodiment, there are recorded in the phase difference recorder 26 the timing 4 at which the synchronism pattern is initially detected, the difference 3 (7-4) between the timing at which the synchronism pattern is detected twice and the timing at which the synchronism pattern is initially detected, and a difference 5 (12-7) between the timing at which the synchronism pattern is detected thrice and the timing at which the synchronism pattern is detected twice, and unless a synchronism is obtained at the timing 4, the timing of the synchronism pattern 70 is shifted by 3 to make a decision of synchronism at a resultant timing, and unless a synchronism is then obtained, the timing of the synchronism pattern 70 is further shifted by 5 to make a decision of synchronism

at a resultant timing.

Like effects to the second embodiment can be achieved by the third embodiment also.

According to the present invention, there can be obtained a synchronization between reception data and expectation data even with an inconsistency in phase due to a false synchronism pattern.

**06984**

## WHAT IS CLAIMED IS:

1. A reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a synchronism pattern detecting position recording means for recording a synchronism timing at which the synchronism pattern of the reception data is detected;

a collation and synchronism decision means for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a synchronism control means operative, when the collation and synchronism decision means gives a decision for inconsistency in phase, for a match between a timing at which the synchronism pattern is detected after the synchronism timing recorded in the synchronism pattern detecting position recording means and a timing of a synchronism pattern of the expectation data.

2. A reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a synchronism pattern detecting timing recording means for recording a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data;

a collation and synchronism decision means for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating means operative, when the collation and synchronism decision means gives a decision for inconsistency in phase, for a match between the synchronism pattern detecting timing recorded in the synchronism pattern detecting timing recording means, as a subsequent one, and a timing of a synchronism pattern of the expectation data.

3. A reception data synchronizing apparatus according to claim 2, wherein the timing generating means transmits a predetermined reference timing signal, and the synchronism pattern detecting timing recording means records the reference timing signal when the synchronism pattern is detected, as the synchronism pattern detecting timing.

4. A reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a phase difference recording means for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as an initial one at which the synchronism pattern is initially detected;

a collation and synchronism decision means for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating means operative, when the collation and synchronism decision means gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data from the synchronism pattern detecting timing, as the initial one, by the time difference recorded in the

synchronism pattern detecting timing recording means.

5. A reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a phase difference recording means for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as a previous one at which the synchronism pattern is detected in a previous time;

a collation and synchronism decision means for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating means operative, when the collation and synchronism decision means gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data by the time difference recorded in the synchronism pattern detecting timing recording means.

6. A reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a synchronism pattern detecting position recording step for recording a synchronism timing at which the synchronism pattern of the reception data is detected;

a collation and synchronism decision step for collating the reception data

with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a synchronism control step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for a match between a timing at which the synchronism pattern is detected after the synchronism timing recorded in the synchronism pattern detecting position recording step and a timing of a synchronism pattern of the expectation data.

7. A reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a synchronism pattern detecting timing recording step for recording a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data;

a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for a match between the synchronism pattern detecting timing recorded in the synchronism pattern detecting timing recording step, as a subsequent one, and a timing of a synchronism pattern of the expectation data.

8. A reception data synchronizing method according to claim 7, wherein the timing generating step transmits a predetermined reference timing signal, and the synchronism pattern detecting timing recording step records the reference



timing signal when the synchronism pattern is detected, as the synchronism pattern detecting timing.

9. A reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a phase difference recording step for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as an initial one at which the synchronism pattern is initially detected;

a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data from the synchronism pattern detecting timing, as the initial one, by the time difference recorded in the synchronism pattern detecting timing recording step.

10. A reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a phase difference recording step for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as a

previous one at which the synchronism pattern is detected in a previous time;

a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data by the time difference recorded in the synchronism pattern detecting timing recording step.

11. A computer-readable medium embodying a program of instructions for execution by the computer to perform a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a synchronism pattern detecting position recording step for recording a synchronism timing at which the synchronism pattern of the reception data is detected;

a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a synchronism control step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for a match between a timing at which the synchronism pattern is detected after the synchronism timing recorded in the synchronism pattern detecting position recording step and a timing of a synchronism pattern of the expectation data.

12. A computer-readable medium embodying a program of instructions for

execution by the computer to perform a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a synchronism pattern detecting timing recording step for recording a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data;

a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for a match between the synchronism pattern detecting timing recorded in the synchronism pattern detecting timing recording step, as a subsequent one, and a timing of a synchronism pattern of the expectation data.

13. A computer-readable medium according to claim 12, wherein the timing generating step transmits a predetermined reference timing signal, and the synchronism pattern detecting timing recording step records the reference timing signal when the synchronism pattern is detected, as the synchronism pattern detecting timing.

14. A computer-readable medium embodying a program of instructions for execution by the computer to perform a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a phase difference recording step for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as an initial one at which the synchronism pattern is initially detected;

a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data from the synchronism pattern detecting timing, as the initial one, by the time difference recorded in the synchronism pattern detecting timing recording step.

15. A computer-readable medium embodying a program of instructions for execution by the computer to perform a reception data synchronizing method for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a phase difference recording step for recording a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as a previous one at which the synchronism pattern is detected in a previous time;

a collation and synchronism decision step for collating the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating step operative, when the collation and synchronism decision step gives a decision for inconsistency in phase, for shifting a

synchronism timing of the expectation data by the time difference recorded in the synchronism pattern detecting timing recording step.

16. A reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a synchronism pattern detecting position recording device that records a synchronism timing at which the synchronism pattern of the reception data is detected;

a collation and synchronism decision device that collates the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a synchronism control device operative, when the collation and synchronism decision device gives a decision for inconsistency in phase, for a match between a timing at which the synchronism pattern is detected after the synchronism timing recorded in the synchronism pattern detecting position recording device and a timing of a synchronism pattern of the expectation data.

17. A reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a synchronism pattern detecting timing recording device that records a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data;

a collation and synchronism decision device that collates the reception

data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating device operative, when the collation and synchronism decision device gives a decision for inconsistency in phase, for a match between the synchronism pattern detecting timing recorded in the synchronism pattern detecting timing recording device, as a subsequent one, and a timing of a synchronism pattern of the expectation data.

18. A reception data synchronizing apparatus according to claim 2, wherein the timing generating device transmits a predetermined reference timing signal, and the synchronism pattern detecting timing recording device records the reference timing signal when the synchronism pattern is detected, as the synchronism pattern detecting timing.

19. A reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a phase difference recording device that records a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as an initial one at which the synchronism pattern is initially detected;

a collation and synchronism decision device that collates the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and

a timing generating device operative, when the collation and synchronism decision device gives a decision for inconsistency in phase, for shifting a

synchronism timing of the expectation data from the synchronism pattern detecting timing, as the initial one, by the time difference recorded in the synchronism pattern detecting timing recording device.

20. A reception data synchronizing apparatus for a synchronization to be obtained between reception data having a synchronism pattern for a synchronism to be obtained and expectation data as an expected value of the reception data, comprising:

a phase difference recording device that records a time difference between a synchronism pattern detecting timing at which the synchronism pattern is detected in the reception data and the synchronism pattern detecting timing, as a previous one at which the synchronism pattern is detected in a previous time;

a collation and synchronism decision device that collates the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data; and


a timing generating device operative, when the collation and synchronism decision device gives a decision for inconsistency in phase, for shifting a synchronism timing of the expectation data by the time difference recorded in the synchronism pattern detecting timing recording device.

## ABSTRACT OF THE DISCLOSURE

A synchronism pattern detecting timing recorder (20) records a synchronism pattern detecting timing at which a synchronism pattern is detected in reception data, a synchronism decider (12) collates the reception data with reference data to decide whether or not the reception data is consistent in phase with the reference data, and a timing generator (22) operates, when the synchronism decider (12) gives a decision for inconsistency in phase, for a match between the synchronism pattern detecting timing recorded in the synchronism pattern detecting timing recorder (20), as a subsequent one, and a timing of a synchronism pattern of the expectation data, and the subsequent synchronism pattern detecting timing in record is used to render the phases consistent, allowing for a rapid synchronization to be obtained, without the need of waiting a detection of synchronism pattern, even with an inconsistency in phase due to a false synchronism pattern.


Figure 4




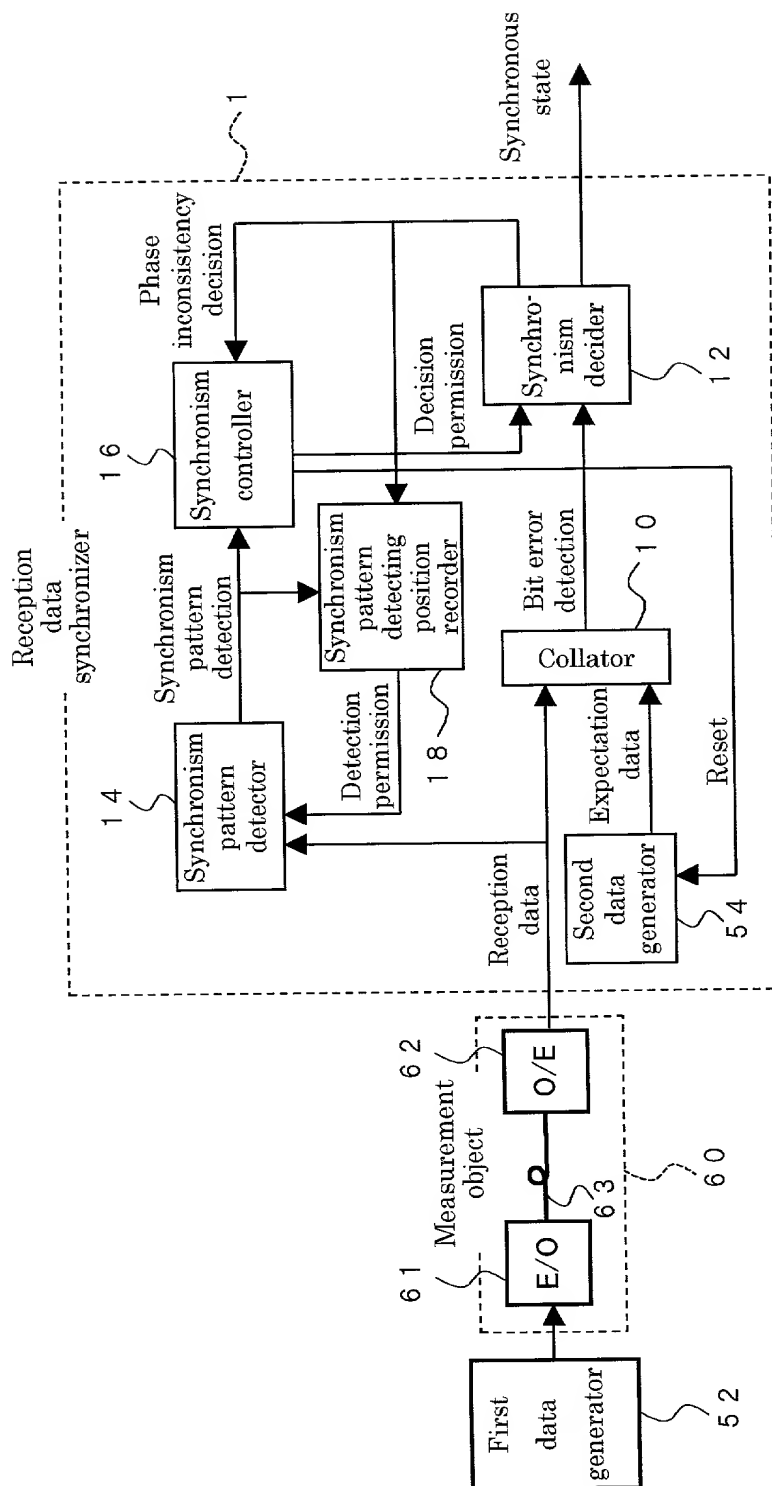



FADT0014\_Fig. 1




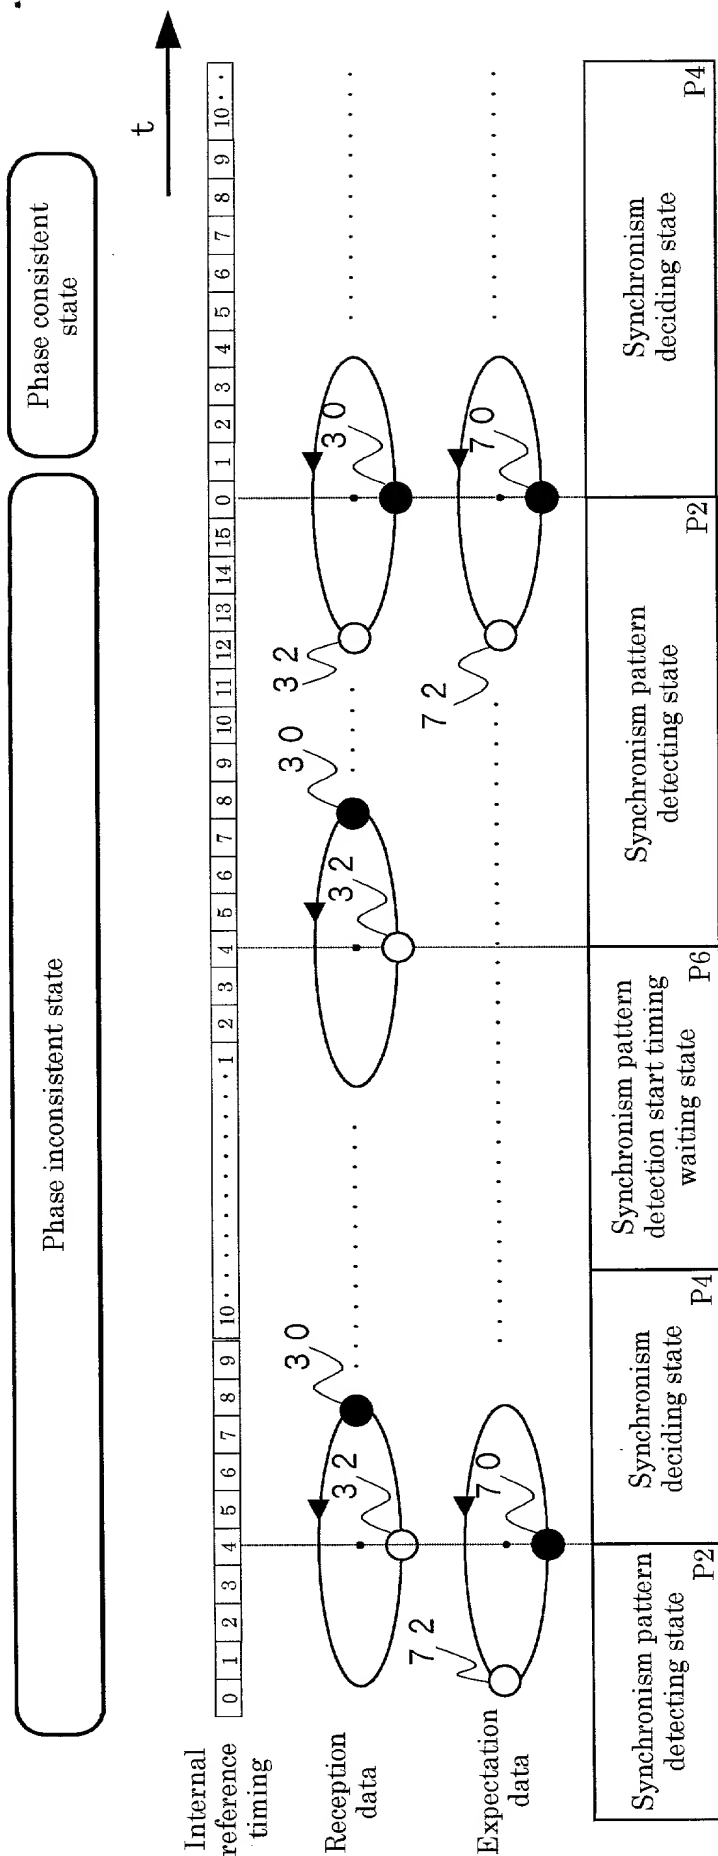

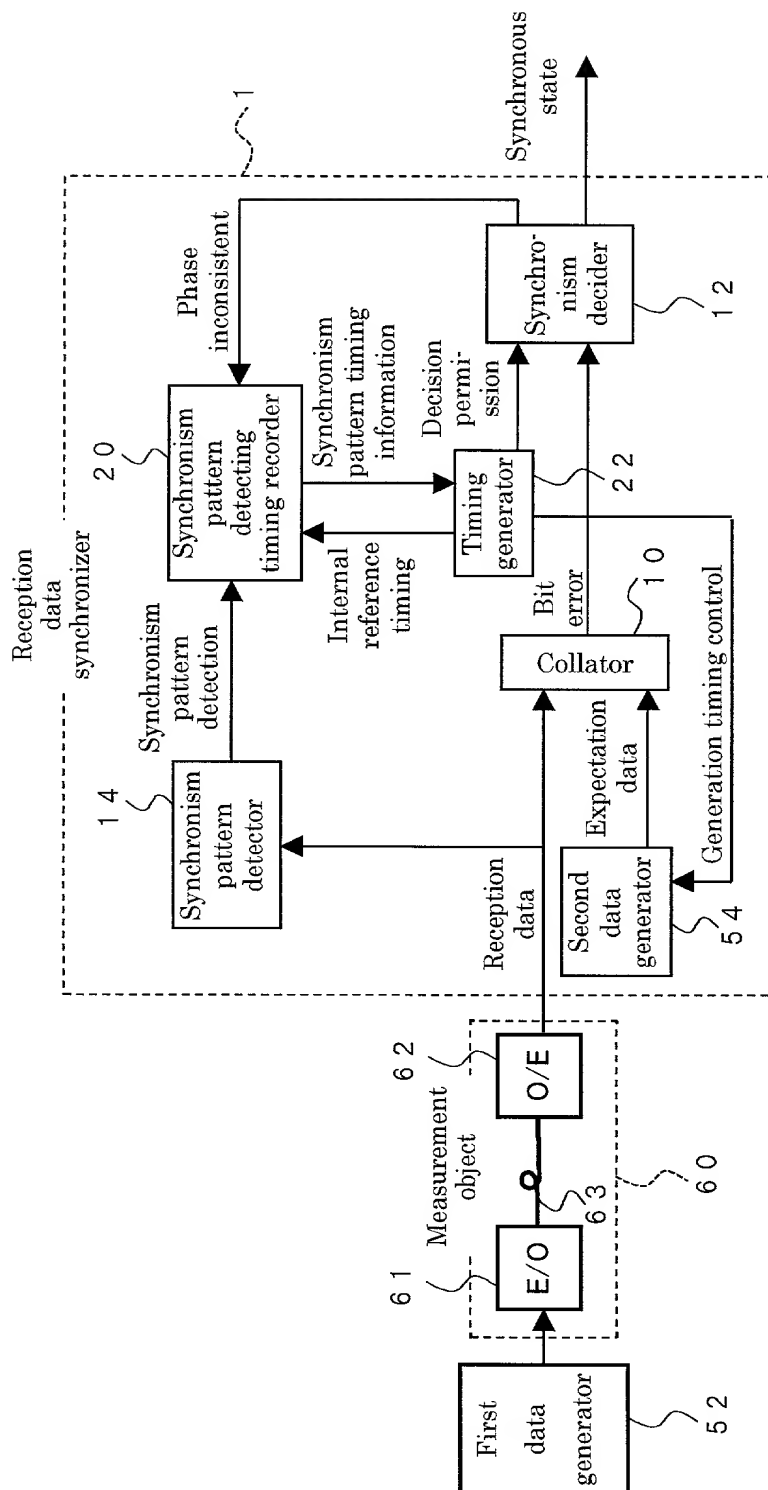

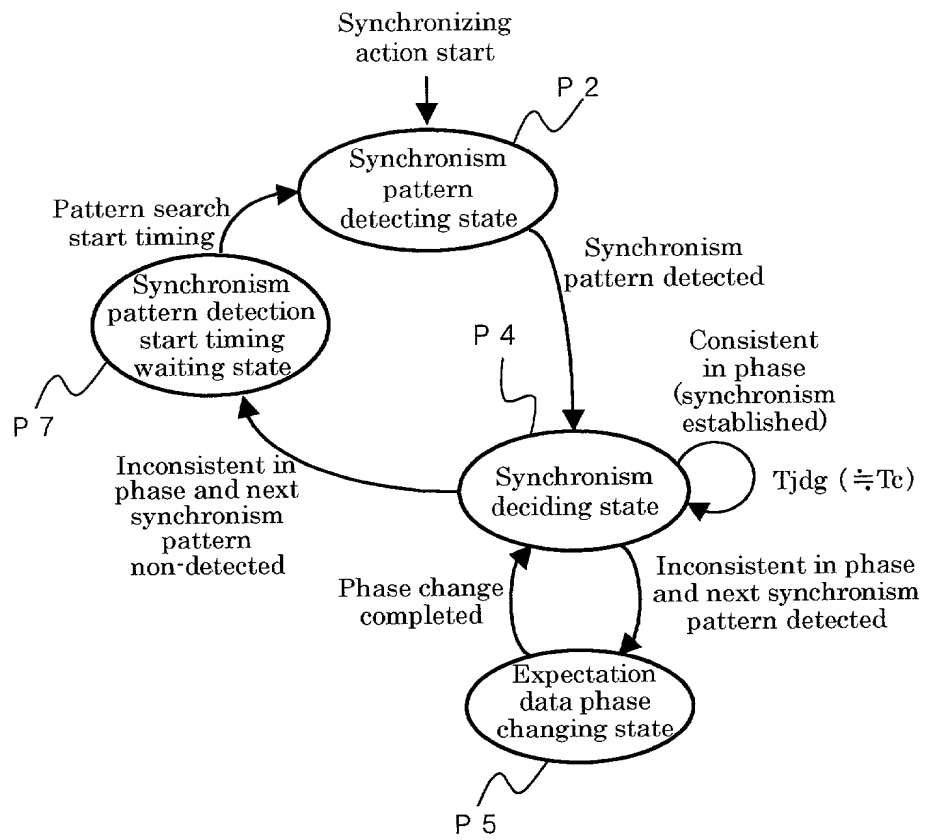

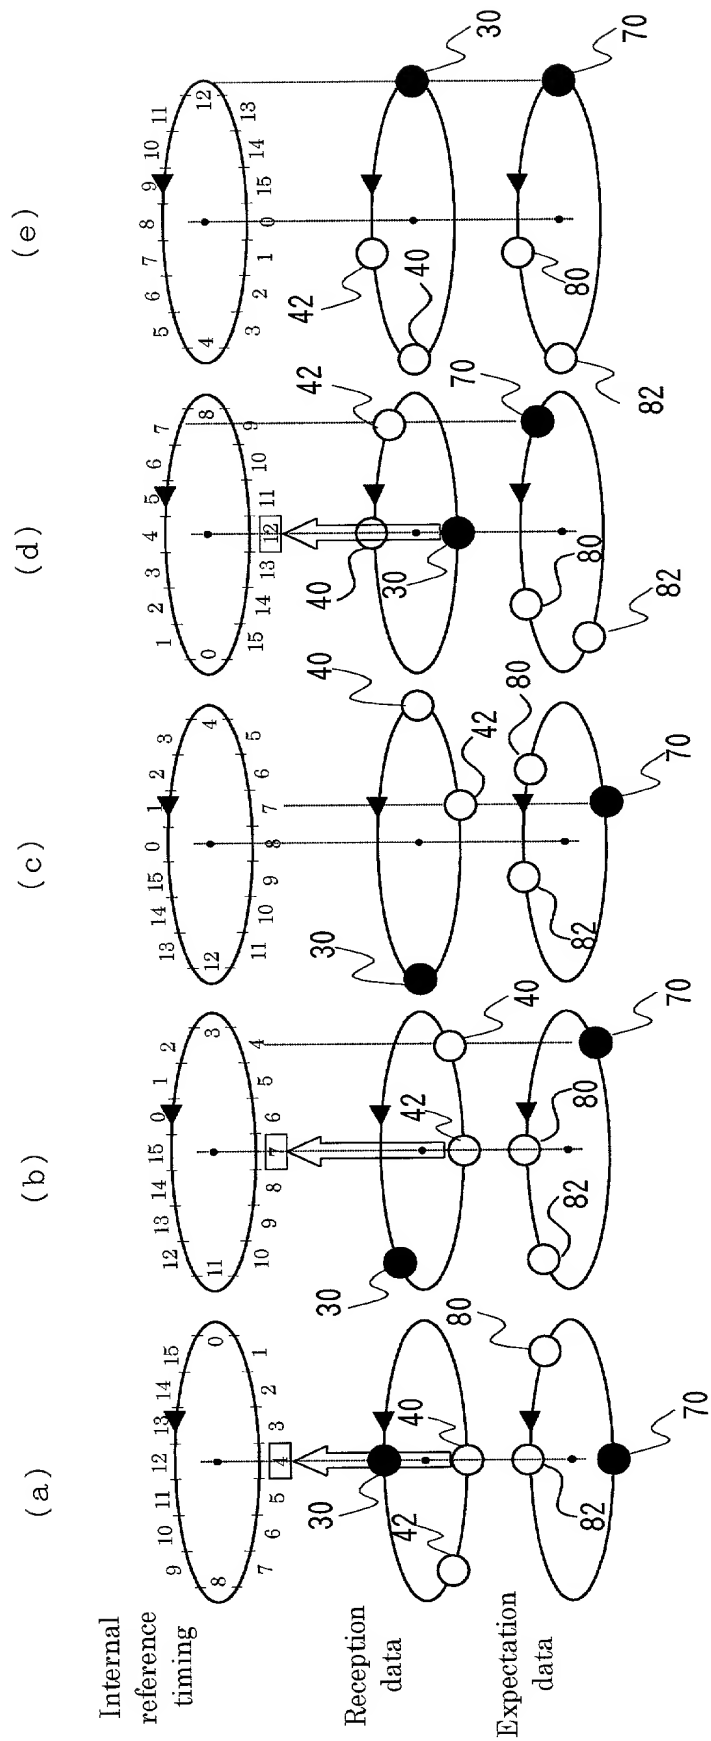

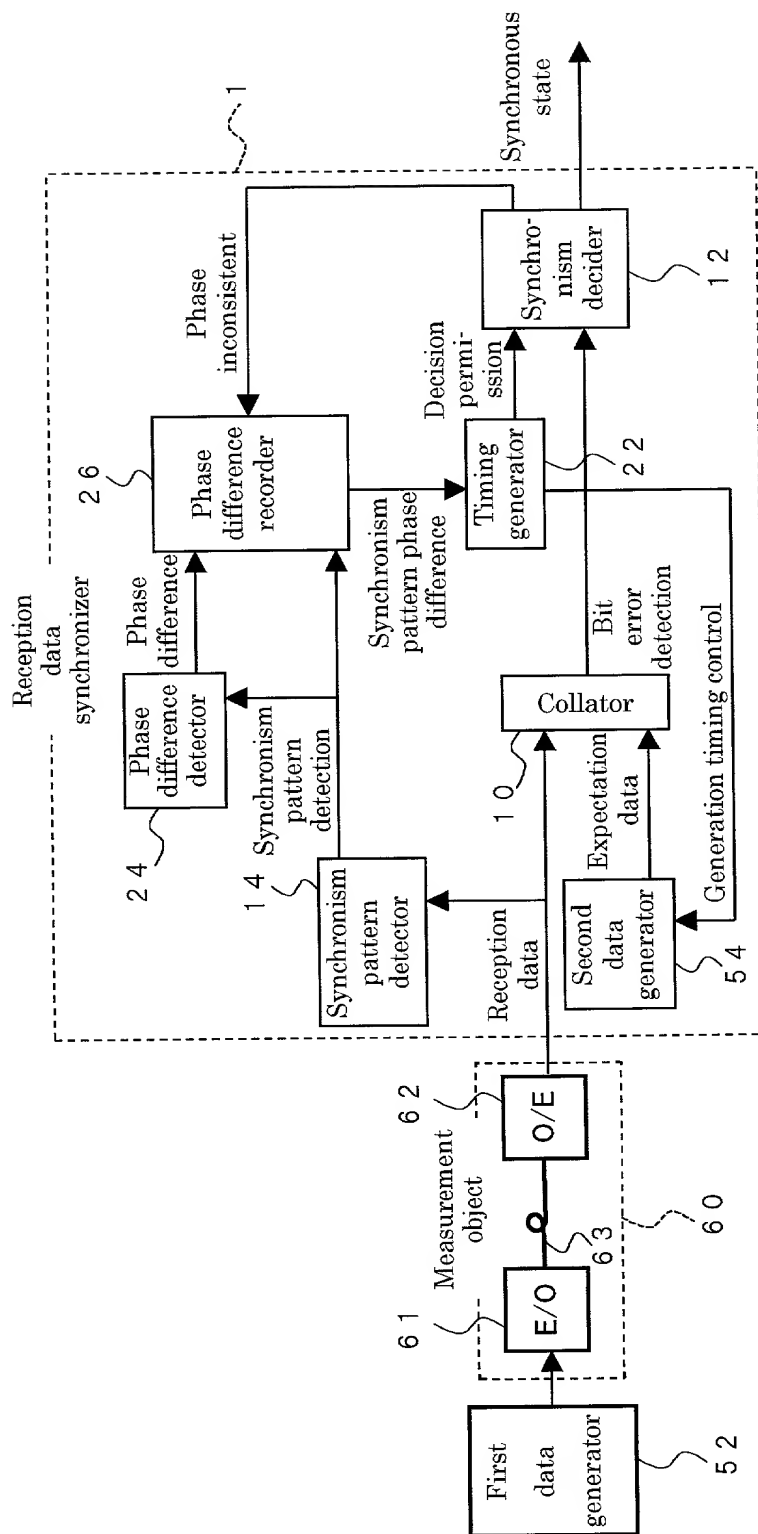





Docket No.:

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below ) of the subject matter claimed and for which a patent is sought on the invention entitled RECEPTION DATA SYNCHRONIZING APPARATUS AND METHOD, AND RECORDING MEDIUM WITH RECORDED RECEPTION DATA SYNCHRONIZING PROGRAM

the specification of which  
[X] is attached hereto [ ] was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable )

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):			Priority Claimed	
Number	Country	Day/Month/Year filed	Yes	No
3236274/1999	Japan	15/11/1999		X

I hereby claim the benefit under 35 USC §119(e) of any United States provisional application(s) listed below.

Prior Provisional Application(s):	
Application Number	Filing Date

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application :

Prior U. S. Application(s) :		
Serial No.	Filing Date	Status : Patented, Pending, Abandoned

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Allan M. Lowe, Reg. No. 19,641; Benjamin J. Hauptman, Reg. No. 29,310; Israel Gopstein, Reg. No. 27,333; Kenneth M. Berner, Reg. No. 37,093; Michael G. Gilman, Reg. No.19,114; Albert J. Fasulo II, Reg. No. 43,607; and Randy Noranbrock, Reg. No. 42,940, all of

LOWE HAUPTMAN GOPSTEIN GILMAN & BERNER, LLP  
1700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

\*\*\*\*\*

Full name of sole or first inventor : Kazuhiro SHIMAWAKI

Inventor's signature : Kazuhiro Shimawaki Date : 2000, 11, 6

Residence : Saitama-ken, Japan

Citizenship : Japan

Post Office Address : c/o ADVANTEST Corporation 1-32-1 Asahi-cho, Nerima-ku, Tokyo, 179-0071 Japan

\*\*\*\*\*

Full name of second joint inventor :

Inventor's signature : Date :

Residence :

Citizenship :

Post Office Address :

\*\*\*\*\*

Full name of third joint inventor :

Inventor's signature : Date :

Residence :

Citizenship :

Post Office Address :

\*\*\*\*\*

Full name of fourth joint inventor :

Inventor's signature : Date :

Residence :

Citizenship :

Post Office Address :

\*\*\*\*\*

Full name of fourth joint inventor :

Inventor's signature : Date :

Residence :

Citizenship :

Post Office Address :

\*\*\*\*\*